


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS						
REV	ECR	DESCRIPTION			DATE	INITIAL
1		AS DRAWN BY CANAM			5/13/2013	CFS
2	14-0090	CH'D TITLEBLOCK WAS RED BARN IS DART, ADDED 10.0 MIN LENGTH NOTE, ADDED SPACER C45-8-2-4, & CONNECTORS 32446. C10-12-0 ADDED ENGRAVE BATCH NUMBER NOTE: C10-12-1 CH'D MAT'L WAS STEEL IS S.S., ADDED B/O INFO #92383A695.			7/25/2014	JAG RW

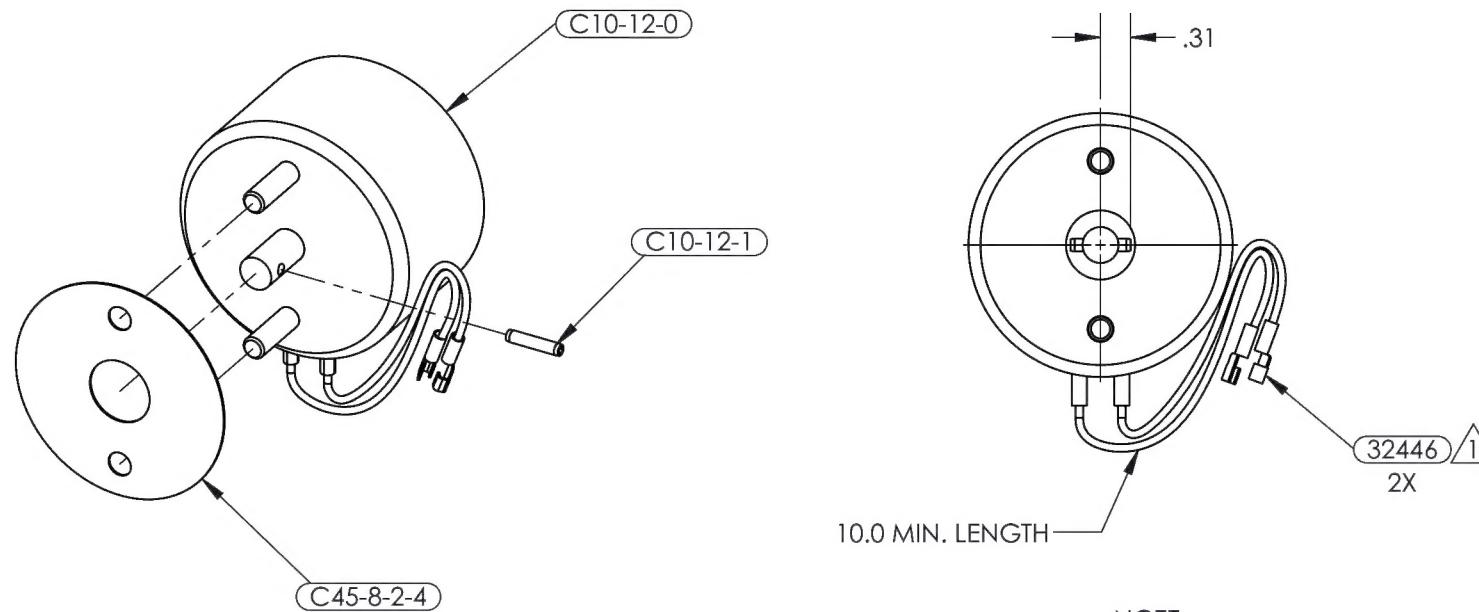



NOTE:

CONNECTORS SUPPLIED LOOSE WITH ASSEMBLY.

		TITLE		DWG NO.		REV				
				C10-12		2				
MAT'L		DRAWN BY:		APPROVED		CANAM				
							<i>D Weil</i>			
		UNLESS OTHERWISE SPECIFIED		HEAT						
		DIMENSIONS ARE IN INCHES		TREAT						
		.XXX ± .005	FRACTIONS ± 1/8	FINISH						
		.XX ± .01								
		.X ± .1	ANGLES ± 5°							
				SPEC						
		1. BREAK ALL SHARP EDGES .015 x 45°								
		OR .015R								
		2. DIMENSIONAL LIMITS APPLY AFTER								
		PLATING								
				USED ON MODEL						
ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.		
		B/O	C10-12-0	1	SOLENOID		H-2553-020 (MODIFIED)	2		
		B/O	C10-12-1	1	SPRING PIN	S.S.	Ø1/8 X 5/8 MCMASTER-CARR #92383A695	1		
			C45-8-2-4	1	SPACER		SEE DWG. C45-8-2	1		
		B/O	32446	2	22-16 AWG KNIFE CONNECTOR		ALLIED ELECTRONICS 32446	1		
						SCALE	1:2	DATE	4/26/2002	SHEET 1 OF 2

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

			REVISIONS		
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
2	01-0090	C10-12-0 ADDED ENGRAVE BATCH NUMBER NOTE.	7/25/2014	DPD	JAG

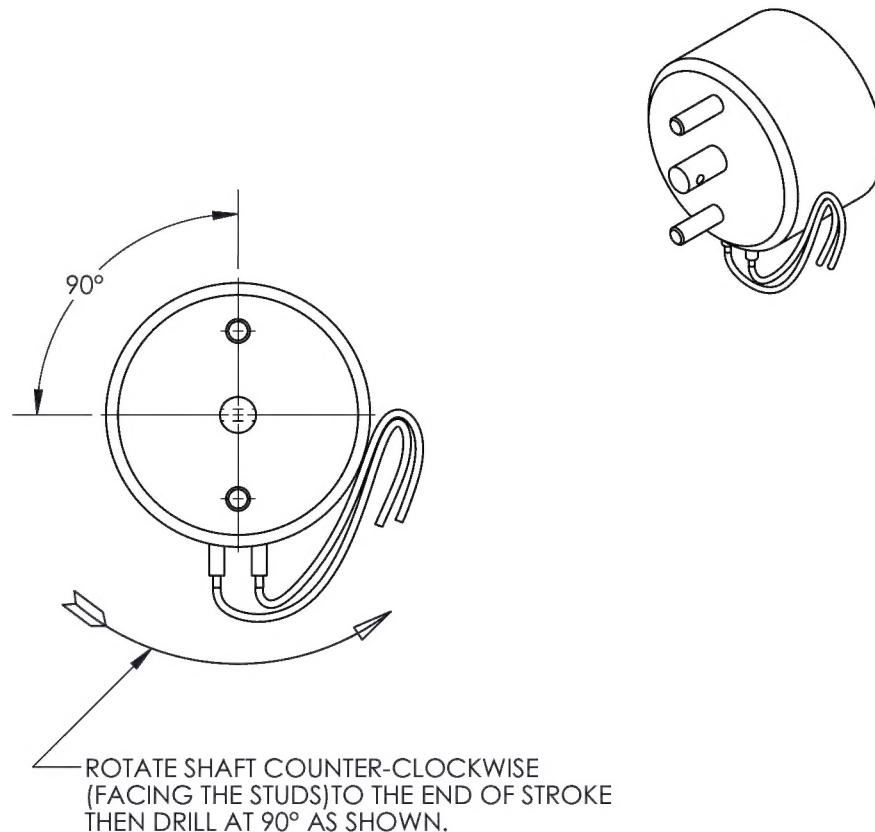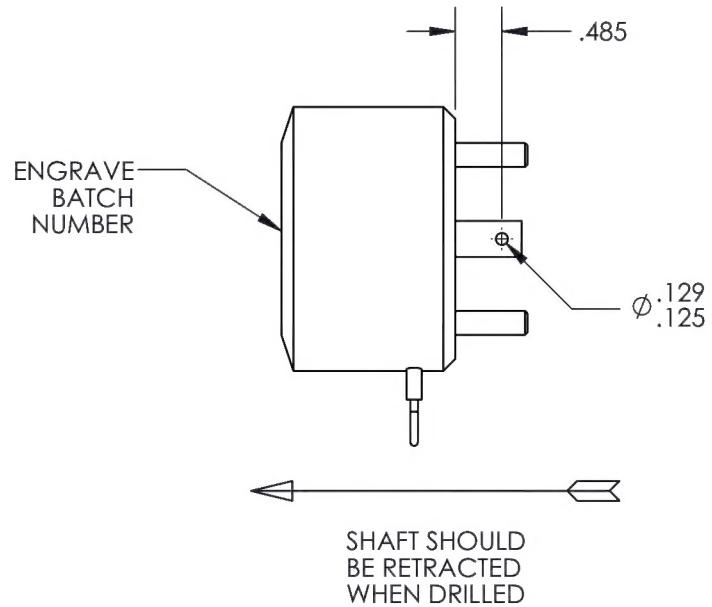

(C10-12-0)

SOLENOID

DART AEROSPACE	
TITLE	
DWG NO.	C10-12-0
MAT'L	DRAWN BY: CANAM
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	APPROVED <i>D. Weil</i>
.XXX ± .005	FRACTIONS ± 1/8
.XX ± .01	ANGLES ± 5°
.X ± .1	
1. BREAK ALL SHARP EDGES .015 x 45° OR .015R	HEAT TREAT FINISH
2. DIMENSIONAL LIMITS APPLY AFTER PLATING	SPEC
	USED ON MODEL
SCALE 1:2	DATE 12/19/2001
	SHEET 2 OF 2